

axis
JAPAN

日本の品質
— JAPAN QUALITY —



C40
Heavy Duty Multifit Camera

HEAVY DUTY MULTIFIT CAMERA

GENERAL:

After installation, the sideview system will automatically activate when turning indicator is selected. This provides a clear image for the driver as a protection from injury or damage to children, pedestrians and property. It also avoids costly repairs to your vehicle.

CAMERA:

The stealth camera can be mounted above the door pillar or on other panels.

INSTALLATION:

- Carefully choose the installation position.
- Using an Allen Key, remove the 4 bolts that enable the mounting bracket to be installed.
- Carefully drill holes for mounting screws.
- Rotate camera module for correct left or right side orientation.
- Insert and tighten 4 bolts after camera orientation and angle have been determined.

CAMERA ORIENTATION & IMAGE CALIBRATION:

- The C40 has a white dot next to the lens, which must to be adjusted when mounted.
- Rotate the lens so that this white dot is vertically above the lens.

Side Mounting



Incorrect position of white dot



Correct position of white dot

Rear Mounting




Incorrect position of white dot



Correct position of white dot


WIRING CONNECTION

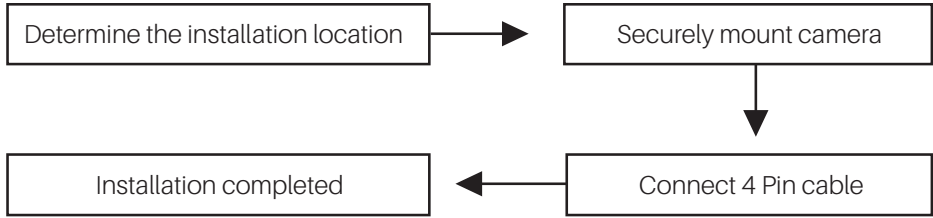

STANDARD *axis* 4-PIN CONNECT SYSTEM

MONITOR

4-Pin Locking Socket (Female) Connection




Definition: Connector Front View

CAMERA

4-Pin Locking Plug (Male) Connection



Definition: Connector Front View



SPECIFICATIONS

- Image Sensor: 1/3" Colour CMOS
- Camera Angle: 150° Diagonal
- Camera Adjustment: 360° Rotational & Vertical (Manual Adjustment)
- Effective Pixels: 960x576
- Resolution: 600 TV Lines
- TV System: PAL
- Sensor size: 4.88x3.67mm
- Scanning System: 2:1 Interlaced
- Sync System: Internal
- Minimum Illumination: 0.01Lux(day) 0Lux(with IR LED)
- Video Output: 1.0Vp-p, 75 Ohm
- Signal to Noise Ratio: better than 43.3dB
- White balance: auto
- Electronic Shutter: auto
- Operating Temp: -20° to +70°
- Connector: 4 pin aviation plug
- Current Consumption: 100mA
- Power Supply: 12V DC - Negative ground
- IP rating: IP69K Water, Dust proof
- Construction: Die Cast Housing
- Night Vision: 5 IR LED - Effective 5m Approx
- Audio Mic: No
- Dimensions: 56.77W x 41.46H x 68.38D mm

WARRANTY

Congratulations on your purchase. You're joining thousands of satisfied customers who enjoy & experience the benefits of the products we distribute. In the unlikely event that some technical difficulty arises with your purchase, be assured that we are most anxious to see that the problem is quickly rectified to your satisfaction. Please familiarise yourself with the following simple conditions of our warranty. This warranty covers faults through component failure or failure of the product to operate in accordance with published specifications. Product failure as a result of unreasonable environmental conditions, accident, misuse, improper installation, unauthorised repair, vehicle electrical or wiring faults or neglect etc, will not be covered by this warranty. Removal and installation costs, if any, would be paid by the owner as well as any freight or postage costs of transporting the product to AUTOBACS AUSTRALIA PTY LTD and shall not be liable or responsible for any loss of use of this product or any form of consequential loss.

CONSUMER WARRANTY

This product is warranted by AUTOBACS AUSTRALIA PTY LTD to be free from defects in materials and workmanship under **NORMAL USE** for a period of **TWENTY FOUR MONTHS** from the date of purchase.

WITHIN 30 DAYS OF PURCHASE DATE:

Please return the unit for replacement to our National Service Centre or the Retailer from where you made the purchase. All accessories must be included. Proof of purchase date **must** accompany the products.

AFTER 30 DAYS OF PURCHASE DATE:

Warranty repair and service is carried out by our National Service Centre. Repair and service will be carried out at no cost to the owner if proof of ownership and the date of purchase can be verified to the satisfaction of the authorised centre concerned with this repair. This proof should take the form of either:

- a) The warranty card accompanying this product, stamped and dated by the dealer.
- b) A Tax Invoice or Receipt showing full details of original vendor, purchaser, model number and serial number.

COMMERCIAL WARRANTY

A product used in or associated with a commercial application will carry a limited TWELVE MONTHS warranty. An abnormal commercial application is one where usage, dust, vibration, heat/cold and other environmental conditions exist at an extreme level.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Purchaser's Name: _____

Purchaser's Address: _____

Model Number: _____ **Serial Number:** _____

Dealer Name: _____ **Date of Purchase:** / /

Dealer Address: _____

Invoice/Sales Docket no: _____

General Hints: To expedite service and prompt return of the equipment, please:

- a) Clearly describe the fault in detail
- b) Safely and securely pack the unit for transport
- c) Include your return address
- d) Provide proof of purchase date as outlined above

National Service Contacts:
AUTOBACS AUSTRALIA PTY LTD
Telephone: 1300 288 029
email: services@autobacs.com.au

